THIRD-ORDER LEVELING SEA LEVEL DATUM OF 1929 38-085-11
CARROLLTON QUADRANGLE
201 KY. - 30 IND.
N3830-W8500/15
DIAGRAM NJ 16-6
LOUISVILLE

UNITED STATES DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY

Carroll, Gallatin, Henry, Owen, and Timble Counties, Ky.
Jefferson and Switzerland
Counties, Ind.


Only the permanent marks are listed for lines run more than 25 years before edition date

Final adjustment of 1973

Edition of 4/12/73

PR: DSW/dt

VEVAY (42 IND.-209KY.)

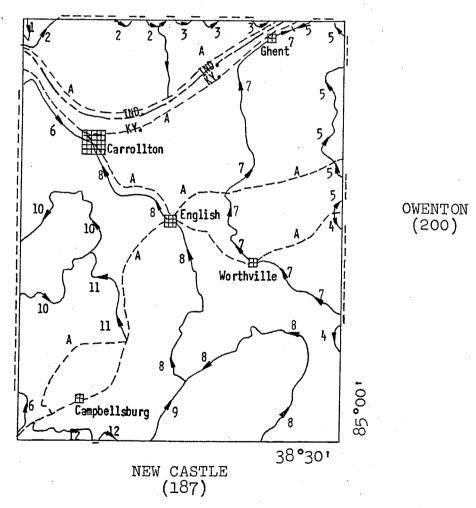

MADISON (202 KY.-31 IND.)

NGS VERTICAL CONTROL DATA

A. Quadrangle 380851

INDEX OF PERMANENT MARKS

MARK (USGS)	PAGE NO.	MARK (USGS)	PAGE NO.
458 TT STA NO 45 TN 1929 TT STA NO 60 TN 1929 TT STA NO 63 TN 1929 TT STA NO 73 TN 1929 TT STA NO 79 TN 1929 111 JWM 1949 474 33 FL 1950 812	795 5 778 6 5,8 874 5 799 12 3,4	56 FL 1950 470 57 FL 1950 853 59 FL 1950 673 60 FL 1950 738 61 FL 1950 793 62 FL 1950 481 65 RHP 1952 776	11 12 12,13 12 13 13 14
34 FL 1950 743 40 FL 1950 495 41 FL 1950 469 42 FL 1950 498 43 FL 1950 607 44 FL 1950 784	4 7 7	<u>USED</u> 535 A 813 836	8 6,11 3
45 FL 1950 458 47 FL 1950 472	8	NGS	
48 FL 1950 834 49 FL 1950 493 50 FL 1950 466 51 FL 1950 841 52 FL 1950 834 53 FL 1950 814 54 FL 1950 921 55 FL 1950 857	7 8 8 9 9 9 10,12 10 10	J 30 1934 P 30 1934 U 30 1934 C 141 1949 H 141 1949 M 141 1949 P 141 1949 Q 141 1949	7 13 13 13 11 11

201 KY.-30 IND.

C. S. Wells

1938

Feet

LINE 1.

C. S. Wells, 1938; Book B 7554

There are no permanent marks on this line in this quadrangle

LINE 2.

C. S. Wells, 1938; Book B 7702

Vevay, 4.8 mi SW. of, along State Highway 56; 500 ft N. of rd. to Lamsons Landing; 250 ft S. of small draw; 120 ft from right bank of Ohio River; on property of John B. Lamson; 88 ft NW. of 16-in. maple tree; 13 ft NE. of NE. corner of barn; in concrete post; USED standard disk designated "836" (Reported not found, 1953)

458.659

LINE 3.

C. S. Wells, 1938; Book B 7702

There are no permanent marks on this line in this quadrangle

LINE 4.

J. W. McLaughlin, 1949; Book AV 104

Worthville, 4.3 mi NE. of; at Eagle Station; 50 ft N. of centerline of rd. crossing Louisville and Nashville Railroad; 18 ft SW. of 20-in. locust tree; 8 ft S. of stone wall; in concrete post; standard tablet stamped "111 JWM 1949 474"

473.941

Reference mark; 80 ft SW. of tablet; on SE. corner of concrete base for signal tower No. 583; chiseled square

475.66

/Jogs into Owenton quadrangle/

U.E., Moxley, 0.5 mi NE. of; at iron and wooden bridge over Little Twin Creek; on NW. corner of center pier; chiseled square

470.02

738.87

12-in. oak tree; copper nail and washer

457.945

LINE 5 (Cont'd.) Feet Ghent, 3.1 mi SE. of; 10 ft N. and 50 ft E. of SE. corner of blacksmith shop; in SW. corner of lot of N. N. Clayton; in concrete post; standard tablet stamped "TT STA NO 45 TN 1929 795" 795.791 /Jogs into Owenton quadrangle/ U.E., Ghent, 3.0 mi NE. of, along U. S. Highway 42, thence 1.1 mi S.; in root on S. side of 20-in. walnut tree; copper nail and washer 772.24 /Jogs into Vevay quadrangle7 Ghent, 1.8 mi NE. of, along U. S. Highway 42; 42 ft N. of, and 0.5 ft lower than centerline of hwy. at junction of driveway to two-story white frame house; 78 ft SW. of centerline of driveway; 74 ft SE. of E. corner of barn; 24 ft W. of fence corner; 6 ft NW. of fenceline; 3 ft NE. of telephone pole; in concrete post; standard tablet stamped "TT STA NO 63 TN 1929" (Tied by NGS, 1954) 483.349 LINE 6. F. Ludke, 1950; Book AV 190 Campbellsburg, 2.6 mi W. of, along U. S. Highway 421; 30 ft S. of centerline of hwy. at junction of T-rd. S.; 5 ft N. of NW. corner post of fence around cornfield; in concrete post; standard tablet stamped "TT STA NO 73 TN 1929 874" 874.139 /Jogs into Madison quadrangle/ U.E., Prestonville, 4.0 mi NW. of, along State Highway 36, thence 0.4 mi S.; on W. concrete retaining wall of bridge over creek; chiseled square 474.82 Prestonville, 2.8 mi NW. of, along State Highway 36; 49 ft S. of junction of T-rd. N.; 36 ft SE. of, and 3 ft lower than centerline of Highway 36; 20 ft NE.

of telephone pole; in concrete post; standard tablet stamped "458" (Replaces "TT STA NO 67 TN 1929")

(Tied by NGS, 1954)

LINE 6 (Cont'd.)	Feet
Reference mark; 490 ft E. of tablet; 25 ft NE. of centerline of State Highway 36; on concrete base for "GULF" signpost; chiseled square	461.68
U.E., Prestonville, 1.0 mi W. of; at bridge over Little Kentucky River; on NE. abutment; chiseled square	462.66
Prestonville; at N. end of Pike Street; 537 ft S. of left bank of Ohio River; 123 ft W. of left bank of Kentucky River; 63 ft W. of, and 5.5 ft higher than centerline of Pike Street; at two-story house owned by Jesse Brooks Estate; 13 ft NNW. of NE. corner of porch; on iron pipe over copper bolt; USED standard cap stamped "813" (Tied by NGS, 1954)	459.512
LINE 7.	,
F. Ludke, 1950; Book AV 190	
U.E., Moxley, 0.5 mi NE. of; chiseled square (Described in line 4)	470.01
/Jogs into Owenton quadrangle7	
U.E., Moxley, 1.4 mi N. of; on stone step to abandoned chicken coop; chiseled square	530.27
Wheatley, 3.6 mi SW. of, along U. S. Highway 227; 3.5 mi SE. of Worthville; 20 ft S. and 30 ft W. of centerline of Highway 227 at junction of third-class T-rd. S.; 5 ft N. of maple tree; in concrete post; standard tablet stamped "TT STA NO 60 TN 1929 778" (Reported destroyed,	
1960)	778.080
Reference mark; 70 ft N. of tablet; 15 ft N. of centerline of U. S. Highway 227; on rock outcrop; chiseled square	770.57
U.E., Worthville, 2.4 mi SE. of; 100 ft S. of centerline of U. S. Highway 227 at junction of T-rd. NE.; on N. end of concrete headwall;	
chiseled square	528.31

LINE 7 (Cont'd.)	<u>Feet</u>
U.E., Worthville, 2.0 mi SE. of; at small wet weather creek; on NW. wingwall; chiseled square	497.64
Worthville, 1.1 mi SE. of, along U. S. Highway 227; 56 ft W. of center of triangle formed by junction of rd. W.; 52 ft SW. of, and 3 ft higher than centerline of hwy. at curve; 4 ft E. of fenceline; in concrete post; standard tablet stamped "40 FL 1950 495"	494.456
Reference mark; 390 ft E. of tablet; 7 ft S. of centerline of U. S. Highway 227; on S. stone abutment over small drain; chiseled square	497.76
U.E., Worthville, 0.5 mi S. of; at W. end of triangle formed by junction of U. S. Highway 227 and State Highway 355; on concrete culvert; chiseled square	471.06
"J 30 1934" (NGS)	485.780
Worthville, 1.7 mi NW. of, along U. S. Highway 227, thence 0.4 mi E. along rd. following Goose Creek; 20 ft S. of centerline of graveled rd.; 48 ft NE. of NE. corner of residence of Mr. Kopp; 46 ft N. of light pole; in concrete post; standard tablet stamped "41 FL 1950 469"	468.742
Worthville, 3.6 mi NW. of, along U. S. Highway 227, thence 1.2 mi E.; 3.0 mi SW. of Easterday; 30 ft S. of centerline of rd.; 60 ft WSW. of 36-in. sycamore tree; 50 ft NNE. of NW. corner of residence of Mr. Eavers; in concrete post; standard tablet stamped "42 FL 1950 498" (Tied by NGS, 1965)	497.364
Reference mark; 60 ft ENE. of tablet; 17 ft N. of centerline of rd.; in root on SW. side of 36-in. sycamore tree; copper nail and washer	495.69
U.E., Easterday, 1.7 mi S. of; on NE. concrete wingwall of bridge over Whites Run; chiseled square	573.22

LINE 7 (Cont'd.)	<u>Feet</u>
Easterday, 1.2 mi S. of; 100 ft S. and 8 ft E. of centerline of rd. at junction of private drive E.; in NW. concrete wingwall of bridge over White Run; standard tablet stamped	
"43 FL 1950 607" (Tied by NGS, 1965)	607.187
Reference mark; on NE. concrete wingwall of bridge over Whites Run; chiseled square	607.38
U.E., Easterday, 0.5 mi S. of; on NE. wingwall of bridge over Whites Run; chiseled square	639.69
Easterday, 0.6 mi N. of; 30 ft S. and 60 ft E. of, and 6 ft higher than centerline of State Highway 550 at junction of rd. NE.; 3 ft N. of fenceline; in concrete post; standard tablet stamped "44 FL 1950 784"	783.795
Reference mark; 20 ft E. of tablet; 54 ft S. of triangle formed by rd. forks; in root on NW. side of 14-in. walnut tree; copper nail and washer	780.11
Ghent, 1.8 mi SW. of, along U. S. Highway 42, thence 0.5 mi S. along State Highway 550; 11 ft W. of centerline of Highway 550; in NW. concrete wingwall of bridge over McCook Creek; standard tablet stamped "45 FL 1950 458"	458.182
Reference mark; 40 ft SE. of tablet; on SE. concrete wingwall of bridge over McCook Creek; chiseled square	458.15
Ghent; at Baptist Church; 110 ft SE. of, and 3.5 ft higher than centerline of U. S. Highway 42; on S. corner of concrete porch on SW. side of church; USED chiseled square designated "535 A" (Tied by NGS, 1954)	494.999
"TT STA NO 63 TN 1929" (Described in line 5)	
(Tied by NGS, 1954)	483.349

470.014

centerline of private drive; in concrete post; standard tablet stamped "50 FL 1950 RESET 1967"

LINE 8 (Cont'd.)	Feet
Reference mark; 30 ft S. of tablet; 13 ft S. of center- line of State Highway 389; on SE. concrete guardwall of bridge over Canes Run; chiseled square	466.38
Royal, 141 ft SE. of, and 7.5 ft higher than centerline of State Highway 193; 6 ft NE. of front entrance of Port Royal School; 1 ft W. of front bulkhead of school; in concrete post; standard tablet stamped	
"51 FL 1950 841"	840.528
Reference mark; 60 ft SW. of tablet; 125 ft ESE. of centerline of State Highway 193; on concrete base for pump; chiseled square	841.07
Port Royal, 2.6 mi SW. of, along State Highway 193; 30 ft N. and 25 ft W. of centerline of Highway 193 at junction of T-rd. N.; 1 ft SE. of fenceline; in concrete post; standard tablet stamped	
"52 FL 1950 834"	834.083
Reference mark; 50 ft SW. of tablet; 14 ft NW. of centerline of State Highway 193; on concrete abutment; chiseled square	832.51
Port Royal, 1.6 mi SW. of, along State Highway 193, thence 1.6 mi NW.; 67 ft S. of centerline of crossroads; 61 ft SW. of, and 5.5 ft higher than centerline of rd. SE.; 2 ft N. of fenceline; in concrete post; standard tablet stamped "53 FL 1950 814"	814.093
Reference mark; 40 ft N. of tablet; 20 ft SE. of centerline of crossroads; on masonry headwall; chiseled square	806.39
U.E., Port Royal, 1.6 mi SW. of, thence 1.6 mi NW., thence 0.9 mi N.; in floor of abandoned bridge over small gully; spike	719.73
English, 0.8 mi SE. of, along State Highway 389, thence 3.5 mi S. along graveled rd.; 31 ft SW. of and 4 ft higher than centerline of rd. at junction of T-rd. S.; in concrete post; standard tablet	
stamped "54 FL 1950 921"	920.796

LINE 8 (Contid.)	Feet
English, 0.8 mi SE. of, along State Highway 389, thence 1.7 mi S. along graveled rd.; 37 ft NE. of, and 4 ft higher than centerline of graveled rd.; 71 ft S. of SW. corner of residence of Leon Bates; 53 ft SE. of junction of private drive to residence; in concrete post; standard tablet stamped "55 FL 1950 857"	856.596
Reference mark; 10 ft NW. of tablet; in root on SE. side of 14-in. walnut tree; copper nail and washer	851.36
"H 141 1949" (NGS)	473.969
U.E., English, 0.5 mi W. of, along State Highway 389; on NE. concrete wingwall of bridge over small creek; chiseled square	461.86
U.E., English, 1.5 mi NW. of; centerline of State Highway 389 at junction of rd. NE.; on concrete culvert over small drain; chiseled square	487.62
English, 2.0 mi NW. of, along State Highway 389; 31 ft SW. of centerline of hwy.; 142 ft N. of NE. corner of residence of Mr. Batt; 20 ft NW. of junction of private drive; at fence corner; in concrete post; standard tablet stamped "56 FL 1950 470" (Tied by NGS, 1950) (Reported destroyed, 1967)	469.458
Reference mark; 70 ft NW. of tablet; in NE. corner of concrete drain under State Highway 389; chiseled square	467.71
"M 141 1949" (NGS)	462.059
"P 141 1949" (NGS)	494.287
"Q 141 1949" (NGS)	469.323
"813" (USED) (Described in line 6)	459.512

CARROLLTON	201 KY30 IND.	F. Ludke	38 -0 85-11 12
Book AV 190		1950	
	LINE 9.		Feet
₩ Tardina 3000, Deal- 41			
F. Ludke, 1950; Book AV	7 190		
junction of private of fence; at residence of	of, along State Highw of centerline of hwy drive; l ft E. of wood of John Berry; in conc stamped "57 FL 1950	• at en rete	852.864
Reference mark; 40 ft so of concrete cattle gu		orner	850.04
"52 FL 1950 834" (Desc	cribed in line 8)		834.083
	LINE 10.		
F. Ludke, 1950; Book AV	7 190		
S. and W.; 20 ft NE. entrance to home; 3 f	formed by junction of of junction of privates. of SW. corner feandard tablet stamped	rds. e	798.676
centerline of State F	30 ft S. and 16 ft W. Highway 55 at junction wingwall of bridge ov	of of rd.	672.712
Reference mark; 30 ft s wingwall of bridge; of		oncrete	673.35
junction of private of	of centerline of hwy drive to residence of enceline; in concrete	. at E. F.	737.408

Reference mark; 7 ft N. of tablet; in root on S. side of 30-in. walnut tree; copper nail and washer

738.18

-01 111 0 00 111D	
LINE 10 (Cont'd.)	Feet
Prestonville, 3.0 mi S. of, along State Highway 549; 20 ft S. and 19 ft W. of, and 1 ft lower than centerline of hwy. at junction of rd. W.; 1 ft N. of corner fence post; in concrete post; standard tablet stamped "61 FL 1950 793"	792.981
U.E., Prestonville, 4.5 mi SW. of, along U. S. Highway 42, thence O.l mi E.; on NE. wingwall of iron bridge over Little Kentucky River; chiseled square	450.98
Prestonville, 5.4 mi SW. of, along U. S. Highway 42; 131 ft S. and 29 ft W. of, and 5.5 ft higher than centerline of hwy. at junction of graveled rd. E.; 55 ft SSW. of junction of private drive to residence of Mr. Hackett; in concrete post; standard tablet stamped "62 FL 1950 481"	481.246
Reference mark; 440 ft N. of tablet; on W. concrete culvert; chiseled square	468.11
LINE 11.	
F. Ludke, 1950; Book AV 190	
"P 30 1934" (NGS)	746.593
"C 141 1949" (NGS)	635.816
U.E., Turners Station, 2.7 mi N. of; on W. concrete culvert over small drain; chiseled square	544.58
U.E., Turners Station, 3.2 mi NW. of; on N. masonry wingwall of wooden bridge over small creek; chiseled square	562.90
U.E., Turners Station, 4.7 mi NW. of; on W. concrete headwall of culvert over small drain; chiseled square	727.80
"59 FL 1950 673" (Described in line 10)	672.712
LINE 12.	
R. H. Paine, 1952; Book AV 322	
"U 30 1934" (NGS)	757.184

LINE 12 (Cont'd.)	Feet
Campbellsburg, 1.4 mi S. of, thence 0.7 mi W.; ll ft N. and 40 ft W. of centerline of rd. at junction of farm rd. N.; in N. concrete headwall of culvert; standard tablet stamped "65 RHP 1952 776"	776.080
Reference mark; 23 ft S. of tablet; on E. end of S. concrete headwall of culvert; chiseled square	775.81
/Jogs into New Castle quadrangle/	
U.E., Campbellsburg, 2.0 mi S. of, along U. S. Highway 421; 140 ft N. of, and 6 ft lower than centerline of hwy. at junction of graveled rd. W.; on SW. concrete wingwall of bridge: chiseled square	860.22

CARROLLTON QUADRANGLE 201 KY .- 30 IND. N3830+W8500/15 DIAGRAM NJ 16-6 LOUISVILLE

UNITED STATES DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY

Carroll, Gallatin, Henry, Owen and Trimble Counties, Kentucky; Jefferson and Switzerland Counties, Indiana

Edition of 5/27/77

PR: CRV/rmm


MADISON

(202 KY.-31 IND.)

Plane coordinates are based on Lambert projection, Kentucky, North Zone and transverse Mercator projection, Indiana, East Zone

Only the permanent marks are listed for control classified obsolete and are not shown on sketch

VEVAY (42 IND .- 209 KY.)

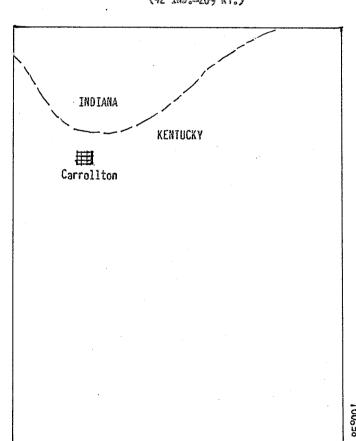

OWENTON (200)

NEW CASTLE (187)

38°30'

DISCLAIMER

We no longer attest to the validity of the positions listed for horizontal control established by transit traverse procedures. This control is now considered OBSOLETE and is included in this list for the purpose of identification only.

INDEX OF PERMANENT MARKS

MARK (USGS)	PAGE NO.
II STA NO 45 TN 1929 795 II STA NO 46 IN 1929 II STA NO 60 IN 1929 778 II STA NO 63 TN 1929 II STA NO 64 TN 1929 II STA NO 65 IN 1929 II STA NO 66 TN 1929 II STA NO 67 IN 1929 II STA NO 73 TN 1929 874 II STA NO 74 IN 1929 II STA NO 75 IN 1929 II STA NO 76 IN 1929 II STA NO 76 IN 1929 II STA NO 77 IN 1929	333333445464
IT STA NO 78 IN 1929 IT STA NO 79 IN 1929 799 IT 1 D 1939 IT 21 DWP 1949 52 FL 1950 834 IT 53 FL 1950 814 IT 54 FL 1950 921 IT 55 FL 1950 857 IT 56 FL 1950 853 IT TT 9 HF 1951 IT 10 HF 1951 IT 11 HF 1951	4455556665777
<u>USED</u> 836	ŕ
NGS	•
G 30 1934 H 141 1949 K 141 1949 N 141 1949 P 141 1949 Q 141 1949	5 6 6 7 7

LATITUDE 0 1 17 LONGITUDE

The following positions are considered OBSOLETE. To be used only to locate permanent marks in the field.

By E. M. Thompson, 1929; Books C8963-64, C9035-36

Ghent, 3.1 mi SE. of; 10 ft N. and 50 ft E. of SE. corner of blacksmith shop; in SW. corner of lot of N. N. Clayton; in concrete post; standard tablet stamped "TT STA NO 45 TN 1929 795"

X = 1.782.382KY. N.)

y = 445.389

38 43 18.54

85 00 45.84

Sanders, 4.5 mi NV. of, along State Highway 47, thence 0.7 mi S.; 5 ft S. and 15 ft W. of triangle formed by junction of Y-rd.; 3 ft W. of thorn tree; in concrete post; standard tablet stamped "TT STA NO 46 TN 1929" (Reported destroyed, 1967)

X = 1.784.424

Y = 432,108

38 41 02.99

85 00 18.66

Wheatley, 3.6 mi SW. of, along U.S. Highway 227; 3.5 mi SE. of Worthville; 20 ft S. and 30 ft W. of centerline of hwy. at junction of T-rd. S.; 5 ft N. of maple tree; in concrete post; standard tablet stamped "IT STA NO 60 IN 1929 778" (Reported destroyed, 1960)

X = 1,779,290 Y = 395,876

38 35 04.42

85 01 19.58

Ghent, 1.8 mi NE. of, along U.S. Highway 42; 42 ft N. of centerline of hwy. at junction of driveway to twostory white frame house; 78 ft SW. of centerline of driveway; 74 ft SE. of E. corner of barn; 24 ft W. of fence corner; 6 ft NW. of fenceline; 3 ft NE. of telephone pole; in concrete post; standard tablet stamped "TT STA NO 63 TN 1929"

X = 1,777,235 Y = 455,867

38 44 57.25

85 01 51.86

Ghent, 1.2 mi SW. of, along U.S. Highway 42; 25 ft W. of private entrance to barn; 2 ft W. of corner fencepost in pasture of A. Van Dever; in concrete post; standard tablet stamped "TT STA NO 64 TN 1929" (Not found, 1952)

X = 1,763,787 Y = 448,096

38 43 39.27

85 04 40.72

Ghent, 4.2 mi SW. of, along U.S. Highway 42; 3.5 mi NE. of Carrollton; in NW. concrete abutment of iron bridge over Four Mile Creek; standard tablet stamped "TI STA NO 65 IN 1929"

X = 1.750.855

Y = 438,957

38 42 07.76

85 07 22.81

Carrollton, 0.5 mi W. of; at Prestonville; 810 ft W. of tollgate at bridge; 50 ft W. of triangle formed by junction of State Highways 36 and 55; 15 ft S. of centerline of Highway 36; in concrete post; standard (Not found, 1951) tablet stamped "TT STA NO 66 TN 1929"

X = 1,731,461 Y = 431,159

38 40 48.79

85 11 26.42

LATITUDE

LONGITUDE

OBSOLETE MARKS (Contid.)

Prestonville, 2.8 mi NV. of, along State Highway 36; 49 ft S. of junction of T-rd. N.; 36 ft SE. of, and 3 ft lower than centerline of hwy.; 20 ft NE. of telephone pole; in concrete post; standard tablet stamped "458" (Replaces "TT STA NO 67 TN 1929")

X = 1.720.555Ky. N.)

Y = 438,715

38 42 02.36

85 13 44.96

Campbellsburg, 2.6 mi W. of, along U.S. Highway 421; 30 ft S. of centerline of hwy. at junction of I-rd. S.; 5 ft N. of NW. corner post of fence around cornfield; in concrete post; standard tablet stamped "TT STA NO 73 TN 1929 874"

X = 1.715.660

Y = 374.604

38 31 28.12

85 14 37.97

Worthville, 0.9 mi W. of; in SW. abutment of Louisville and Nashville Railroad bridge over Kentucky River; standard tablet stamped "IT STA NO 75 IN 1929"

X = 1.762.102

Y = 404.632

38 36 29.49

85 04 57.03

English, 3.0 mi SW. of, along L. & N. RR.; in NW. abutment of RR. bridge No. 10; standard tablet stamped (Not found, 1950) TTT STA NO 77 TN 1929"

X = 1,737,918 Y = 403,460

38 36 15.64

85 10 01.53

Prestonville, 6.0 mi S. of, along State Highway 55; 30 ft N. of triangle formed by junction of hwy. and rd. S.; 20 ft S. and 10 ft E. of "Sherwin-Williams" signboard; in limestone outcrop; standard tablet stamped (Not found, 1951) "TT STA NO 78 TN 1929"

X = 1.729.989

Y = 406.533

38 36 45.22

85 11 41.80

Providence, 0.6 mi N. of, along State Highway 316; 25 ft N. of triangle formed by junction of rds. S. and W.; 20 ft NE. of junction of private entrance to home; 3 ft S. of SW. corner fencepost; in concrete post; standard tablet stamped "IT STA NO 79 IN 1929 799"

X = 1.721.579

Y = 395,315

38 34 53.47

85 13 26.26

By R. C. Darnell, 1939; Book D3139

Vevay, 4.8 mi SW. of, along State Highway 56; 500 ft N. of rd. to Lamsons Landing; 250 ft S. of small drawn; 120 ft from right bank of Ohio River; on property of John B. Lamson; 88 ft NW. of 16-in. maple tree; 13 ft NE. (Not found, 1951) (NOTE: USED position not held) of NE. corner of barn; USED standard disk designated "836" 85 08 00.81

X = 1.747.847

Y = 439.445

38 42 12.29

LATTTUDE

LONGITUDE 0 1 11

OBSOLETE MARKS (Cont'd.)

Vevay; in E. end of bottom step of post office; standard tablet stamped "TT 1 D 1939"

Ky. N.) X = 1.766.570 Y = 455.593

38 44 53.62

85 04 06.45

By D. W. Pinkston, 1949; Book AH 128

Worthville, 2.0 mi NE. of, along L. & N. RR., thence 1.0 mi NW. along Buffalo Creek Road; 600 ft SE. of Buffalo Creek ford; 11 ft NE. of centerline of rd.; 50 ft SE. of small drain crossing; 18 ft N. and 36 ft W. of NW. fence corner; 1 ft W. of retainer wall around residence of Lynn Sutter; in concrete post; standard tablet stamped "IT 21 DWP 1949"

X = 1,771,744 Y = 412,271

38 37 45.85

85 02 56.38

Worthville, 2.0 mi NE. of station, along L. & N. RR.; 0.5 mi NW. of milepost 56; 38 ft S. of centerline of rd.; 22 ft N. of, and 2 ft higher than N. rail of track; in concrete post; NGS standard disk stamped "G 30 1934"

X = 1,776,535 Y = 408,819

38 37 12.13

85 01 55.66

Eagle Station; 1.8 mi SW. of; 2.2 mi NE. of Worthville; 10 ft N. and 20 ft W. of private rd. crossing RR.; 440 ft NW. of milepost 57; in concrete post; standard tablet stamped "IT STA NO 74 TN 1929"

X = 1,778,157 Y = 409,416

38 37 18.17

85 01 35.28

By H. P. Finch, 1951; Book AH 216

Port Royal, 4.5 mi SW. of school, along State Highway 193; 44 ft N. and 30 ft W. of centerline of hwy. at junction of private drive; 1 ft E. of wooden fence at residence of John Berry; in concrete post; standard tablet stamped "57 FL 1950 853 TT"

X = 1.745.226

Y = 370.311

38 30 48.65

85 08 25.43

Port Royal, 2.6 mi SW. of, along State Highway 193; 30 ft N. and 25 ft W. of centerline of hwy. at junction of I-rd. N.; 1 ft SE. of fenceline; in concrete post; standard tablet stamped "52 FL 1950 834 IT"

X = 1.751.069

Y = 377,902

38 32 04.26

85 07 12.83

Port Royal, 1.6 mi SW. of, along State Highway 193, thence 1.6 mi NW.; 67 ft S. of centerline of crossroads; 61 ft SW. of, and 5.5 ft higher than centerline of rd. SE.; 2 ft N. of fenceline; in concrete post; standard tablet stamped "53 FL 1950 814 TT"

X = 1.748.451 Y = 384.378

38 33 08.03

85 07 46.55

LATITUDE

LONGITUDE 0 1 11

OBSOLETE MARKS (Cont'd.)

English, 0.8 mi SE. of, along State Highway 389, thence 3.5 mi S. along graveled rd.: 31 ft SW. of. and 4 ft higher than centerline of rd. at junction; in concrete post; standard tablet stamped "54 FL 1950 921 TT"

Kya Na) X = 1.754.735 Y = 392.889

38 34 32.74

85 06 28,45

English, O.8 mi SE. of, along State Highway 389, thence 1.7 mi S. along graveled rd.; 71 ft S. of SW. corner of residence of Leon Bates; 53 ft SE. of junction of private drive; 37 ft NE. of, and 4 ft higher than centerline of graveled rd.; in concrete post; standard tablet stamped "55 FL 1950 857 IT"

X = 1.753.168

Y = 400.738

38 35 50.19

85 06 49.10

English: 118 ft WSW. of center of crossing of L. & N. RR. track and State Highway 389; 77 ft SSE. of, and across track from station; 61 ft NW. of NW. corner of concrete porch at N. side of two-story frame house; 20 ft S. of S. rail: 4 ft NE. of telephone pole: in concrete post: NGS standard disk stamped "N 141 1949"

X = 1.749.069 Y = 411.824

38 37 39.39

85 07 42.08

English; 20 ft N. of center of southbound RR. track; 10 ft N. and 40 ft W. of SW. corner of L. & N. RR. station; in SE, corner of yard of residence of Dr. Gilbert; in concrete post; standard tablet stamped "IT STA NO 76 TM 1929" (Reported destroyed, 1950)

X = 1,748,999 Y = 411,396

38 37 40.09

85 07 42.96

English, 1.0 mi NW. of, along State Highway 389; on property of Mr. Jones; 309 ft WNW. of, and across hwy. from NW. corner of house with imitation tan brick siding; 55 ft W. of centerline of hwy.; 69 ft NW. of NW. end of concrete bridge under hwy.; \$2 ft SE. of SW. corner of barn; 26 ft NNE. of center of small ditch; in concrete post; NGSnstandard disk stamped "K 141 1949"

X = 1.745.706

Y = 414.175

38 38 02.31

85 08 24.73

English, 2.0 mi NV. of, along State Highway 389; 142 ft N. of NE. corner of residence of Mr. Batt; 31 ft SW. of centerline of hwy.; 20 ft NW. of private drive; at fence corner; in concrete post; standard tablet stamped "56 FL 1950 470 TT" (Reported destroyed, 1967)

X = 1,743,162 Y = 417.957

38 38 39.45

85 08 57.26

Prestonville, 2.4 mi SE. of, along State Highway 55; at junction of State Highway 389; 147 ft NNW. of center of junction; 47 ft WSW. of centerline of Highway 55; 33 ft NNE. of NE. corner of small one-story frame house: 6 ft NE. of 24-in. sycamore tree; in fence corner: 3 ft E. of fenceline; in concrete post; MGS standard disk stamped "N 141 1949"

X = 1.734.950

Y = 420,089

38 38 59.72

85 10 41.02

LATITUDE

LONGITUDE

OBSOLETE MARKS (Cont'd.)

Prestonville, 1.6 mi SE. of, along State Highway 55; 249 ft NNW. of N. corner of two-story white frame house; 235 ft NW. of well pump; 72 ft ENE. of telephone pole; 52 ft WSW. of centerline of hwy.; 5 ft SE. of 6-in. forked locust tree in fence corner; I ft E. of fenceline; in concrete post; NGS standard disk stamped "P 141 1949"

X = 14733,460Ky. N.)

Y = 424.177

38 39 39.98

85 11 00.33

Prestonville, 0.4 mi SE. of, along State Highway 55; at junction of State Highway 549 S.; 61 ft NW. of center of junction; 52 ft NW. of centerline of Highway 549; 16 ft SW. of centerline of driveway; 65 ft NE. of E. corner of two-story red brick house; 7 ft NW. of E. corner of lawn fence; 1 ft NE. of fenceline; 9 ft NW. of 12-in. catalpa tree; in concrete post; NGS standard disk stamped "0 141 1949"

X = 1.729.760

Y = 429.062

38 40 27.89

85 11 47.60

By G. B. Grunwell, 1951; Book AH 216

Brooksburg, 6.2 mi SE. of, along State Highway 56; 48 ft N. and 7 ft W. of junction of Y-rd. W.; 50 ft NNW. of centerline of hwy.; 4 ft N. of hickory tree with two-pronged trunk; in concrete post; standard tablet stamped "TT 9 HF 1951"

X = 1.740.217 Y = 436.338

38 41 40.85

85 09 36.68

Brooksburg, 6.2 mi SE. of, along State Highway 56, thence 2.3 mi N. along graveled rd.; 275 ft SE. of junction of I-rd. WNW.: 17 ft E. of centerline of rd.; 5 ft S. of black walnut tree: in concrete post: standard tablet stamped "TT 10 HF 1951"

X = 1.741.252

Y = 447.696

38 43 33.22

85 09 25.02

Five Points; 410 ft N. of school; 21 ft S. and 57 ft E. of crossroads; 49 ft S. of large locust tree; in concrete post; standard tablet stamped "TT 11 HF 1951"

X = 1,736,303 Y = 455,241

38 44 47.30

85 10 28,41

FOR HORIZONTAL CONTROL

COMPUTER PRINT-CUT

SEE BOOK LEED 6 2 6

MY MAP PROJECT MY 44

COPY SUITABLE FOR XEROX

KK 158 QUAD.

NOTE: This is to be stapled to the inside front cover of the horizontal control folder.